

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 March 2005 (10.03.2005)

PCT

(10) International Publication Number
WO 2005/022259 A2

- (51) International Patent Classification⁷: **G03F 1/14**
- (21) International Application Number:
PCT/US2004/027198
- (22) International Filing Date: 20 August 2004 (20.08.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
10/649,354 26 August 2003 (26.08.2003) US
- (71) Applicant: **INTEL CORPORATION** [US/US]; 2200 Mission College Boulevard, Santa Clara, CA 95052 (US).
- (72) Inventors: **LO, Fu-Chang**; 2779 Ross Road, Palo Alto, CA 94303 (US). **ZIMMERMAN, Paul**; 141 Llano Court, Cedar Creek, TX 78612 (US). **ESCHBACH, Florence**; 25 Bear Paw, Portola Valley, CA 94028 (US). **TREGUB, Alexander**; 140 Symphony Lane, Oak Park, CA 91377 (US).
- (74) Agents: **HARRIS, Scott, C. et al.**; Fish & Richardson P.C., Suite 500, 4350 La Jolla Village Drive, San Diego, CA 92122 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— *without international search report and to be republished upon receipt of that report*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: ATTACHING A PELLICLE FRAME TO A RETICLE

(57) Abstract: A pellicle membrane is mounted between an outer frame and an inner frame. At least one of the frame is attached to the reticle without using conventional adhesive. The pellicle and reticle may be used in a lithography system. The pellicle allows radiation to pass through the pellicle to the reticle and may prevent particles from passing through the pellicle.



WO 2005/022259 A2

ATTACHING A PELLICLE FRAME TO A RETICLE

BACKGROUND

[0001] A microchip manufacturing process may form a photosensitive film or photoresist on one or more deposited layers on a wafer. A photolithography system may transmit light through transmissive optics or reflect light from reflective optics to a reticle or patterned mask. Light from the reticle transfers a patterned image onto the photoresist. Portions of the photoresist which are exposed to light may be removed. Portions of the wafer which are not protected by the remaining photoresist may be etched to form transistor features.

[0002] A microchip manufacturing process may require several lithography processes to be implemented at the wafer level. The pattern imprinted onto the wafer by the photolithography process at different levels is replicated from the reticle. One reticle may be used to reproducibly imprint thousands of wafers. The reticle may be subjected to handling during its lifetime. There may be a pellicle to protect the reticle from particle contamination deposited onto the pellicalized reticle due to environment and handling.

DESCRIPTION OF DRAWINGS

[0003] Fig. 1 illustrates an example of a lithography system.

[0004] Figs. 2A and 2B are top and side views,
5 respectively, of a reticle, a pellicle and a pellicle frame, which may be used in the lithography system of Fig. 1.

[0005] Fig. 3 illustrates defects on the reticle of Fig. 2A after the pellicle and reticle are exposed to radiation in the lithography system of Fig. 1.

10 [0006] Figs. 4A and 4B are a top view and a cross-sectional side view, respectively, of a pellicle, an outer pellicle frame and an inner pellicle frame in accordance with an embodiment.

[0007] Figs. 5A and 5B are a top view and a cross-
15 sectional side view, respectively, of the pellicle, outer pellicle frame, and inner pellicle frame of Fig. 4A with optional screws.

[0008] Figs. 6A and 6B illustrate the pellicle and outer frame of Fig. 4A before a heat treatment and after heat
20 treatment.

[0009] Fig. 7 illustrates the pellicle and pellicle frames of Fig. 4A, a pre-cut polymer layer and a reticle.

[0010] Figs. 8A-8C are side views of a pellicle, a pellicle frame, an adhesive layer and a reticle being
25 mounted and experiencing a temperature change.

[0011] Fig. 9 illustrates a temperature change of reticles and corresponding in-plane displacement or distortion.

[0012] Fig. 10 is a differential scanning calorimetry (DSC) graph of Polytetrafluoroethylene (PTFE), which may be used for the pellicle of Fig. 4A.

[0013] Fig. 11 illustrates a technique of attaching the pellicle to the frames of Figs. 4A-4B and attaching at least one of the frames to the reticle of Fig. 7.

10

DETAILED DESCRIPTION

[0014] Fig. 1 illustrates an example of a lithography system 100 (also called a lithography tool, a lithographic exposure system, a projection printer, a scanner or a stepper). The lithography system 100 may include a laser or radiation source 102, a reflective reticle 107 with a pattern (also called a mask), and a plurality of reflective reduction optics 108. The reticle 107 may be made of glass and chromium. The laser 102 may produce radiation which reflects off the reticle 107 to form a patterned image on an object 110.

20

[0015] Figs. 2A and 2B are top and side views, respectively, of the reticle 107 of Fig. 1, a pellicle 200 and a pellicle frame 202, which may be used in the lithography system 100 of Fig. 1. The pellicle 200 may be a

thin, transparent membrane which allows radiation from the laser 102 to pass through to the reticle 107. The pellicle 200 and frame 202 may be permanently attached to the reticle 107. The pellicle 200 may be held at a fixed distance from the reticle surface. During the lithography process, the image of most particles on the pellicle 200 may be out of focus on the object (wafer) surface and therefore will not generate a defect on the object 110. The original quality of the reticle 107 may therefore be preserved.

10 [0016] Once the pellicle 200 and frame 202 are properly attached, the surface of the reticle 107 may stay free from future particle contamination. A particle or contamination deposited on the reticle 107 may reduce the yield for an object 110 processed by the lithography system 100. The pellicle 200 and frame 202 are intended to protect (e.g., seal off) the reticle 107 from particles falling onto the reticle due to handling the reticle 107. The pellicle 200 may increase the wafer yield of the lithography system 100.

15 [0017] The pellicle 200 may be applied, stretched and attached to the frame 202 with organic adhesives. The adhesives may typically include low molecular weight compounds, e.g., polymers, with additives or solvents, such as perfluorinated amine solvent. Adhesives may also be used to attach the pellicle frame 202 to the reticle 107.

Pressure sensitive gaskets may be used as reticle-to-frame adhesives.

[0018] When the pellicle 200 is exposed to radiation (e.g., scattered light or laser exposure) in the lithography system 100 of Fig. 1, the adhesives and solvents may outgas or evaporate. Adhesive or solvent outgasing may produce one or more types of residual organic vapors, which may include compounds such as perfluorotripropylamine. The outgased organic vapors may harm the pellicle 200 by reducing pellicle transparency, cause pellicle thinning and accelerate pellicle photodegradation. As organic vapor concentrations increase, an amount of energy needed to cause a transmission loss in the pellicle 200 may decrease. Thus, outgased organic vapors may reduce a pellicle's lifetime. Thinning of the pellicle 200 may cause defects or particle contamination on the reticle 107.

[0019] Fig. 3 illustrates defects 300 on the reticle 107 of Fig. 2A generated after the pellicle 200 and reticle 107 are exposed to radiation (e.g., several joules) in the lithography system 100 of Fig. 1. The defects 300 may be caused by outgasing of pellicle adhesives and particle contamination at 248-nm, 193-nm, 157-nm or other wavelength radiation. The defects 300 may further degrade the reticle surface if the pellicle 200 is removed and the reticle 107 is cleaned.

[0020] The present application relates to mounting a pellicle to outer and inner frames and attaching at least one of the frames to a reticle without using conventional adhesives. Mounting techniques described below may reduce defects caused by outgasing and may avoid cleaning processes.

[0021] Figs. 4A and 4B are a top view and a cross-sectional side view, respectively, of a pellicle 402, an outer pellicle frame 404 and an inner pellicle frame 406 in accordance with an embodiment. The pellicle 402 may be optically transparent to a pre-determined exposure wavelength, such as 157 nm, 193 nm, 248 nm or other wavelengths, for example. The pellicle 402 may be a thin polymer membrane, e.g., less than or equal to 10 microns thick, such as 6 microns thick or one micron thick. The pellicle 402 may be a thin film formed by spin coating, extruding, casting or some other method. The pellicle 402 may be any thermoplastic polymer (such as a fluoro polymer, a hydrocarbon polymer, such as cellulose, or a silicon-containing polymer, such as polysilicon) or copolymers of the above polymers, which may meet desired optical transparency and irradiation durability specifications. An example of a specification for optical transparency may be transmission greater than 90% at an exposure wavelength of 157 nm, 193 nm, 248 nm or any other wavelength. An example

of a specification for optical durability may be transmission greater than 90% after several kiloJoules/cm² irradiation equivalent dose at an exposure wavelength of 157 nm, 193 nm, 248 nm or any other wavelength.

5 **[0022]** As an example, the pellicle 402 may be "Cytop" (amorphous cyclized perfluoropolymer or poly(perfluoro(3-butenyl vinyl ether))), available from Asahi Glass Company in Japan, or "Teflon AF," an amorphous cyclized perfluoropolymer that contains a dioxole ring and a liner
10 fluorocarbon chain, available from DuPont Photomask, Inc., or other polymers meeting optical and durability requirements. These polymers may be used for the pellicle 402 of Figs. 4A-4B. To provide a conceptual proof of some aspects of the present application, a sheet of 6-micron
15 thick of a thermoplastic polymer polytetrafluoroethylene (PTFE) film, such as a DF100 C cast film obtained from St. Gobain of Garden Grove, California, was used. PTFE is a polymer comprised of a -CF₂-CF₂- repeat monomer unit.

20 **[0023]** The dual frames 404, 406 in Figs. 4A-4B may be made of metals, such as aluminum or invar (metal alloy containing iron (Fe), nickel (Ni) and cobalt (Co)). The outer pellicle frame 404 may be made of the same material or a different material as the inner frame 406. The frames 404, 406 may have various application-dependent forms. As
25 an example, the frames 404, 406 may have a size of 148 x 122

x 6.3 mm or 148 x 105 x 5.0 mm. Another possible length x width dimension may be 144 mm x 120. Other possible pellicle dimensions may be based at least in part by values from a lithography stepper equipment manufacturer.

5 **[0024]** Mechanical Attachment of Pellicle to Frames

[0025] In an embodiment, the pellicle 402 may be securely attached or clamped between the outer frame 404 and the inner frame 406 mechanically without using an adhesive, as shown in Fig. 4B. The outer and inner frames 404, 406 may
10 be sized and shaped to connect together by, for example, a snap action or a lock action. A top surface 407 of the inner frame 406 presses against an inner surface 408 of the outer frame 404 with the pellicle 402 held between these surfaces 407, 408. The pellicle 402 may be held by
15 friction. This forms a mechanical attachment of the pellicle 402 to the frames 404, 406, which may avoid using an adhesive and may reduce the chance of outgasing.

[0026] An alternative embodiment is shown in Figs. 5A and 5B, which show a top view and a cross-sectional side view,
20 respectively, of the pellicle 402, outer pellicle frame 404, and inner pellicle frame 406 of Fig. 4A with screws 502. The screws 502 may attach the outer frame 404 to the inner frame 406. The screws 502 may also hold the pellicle 402 between the frames 404, 406. The screws 502 may extend in

substantially the same direction as the pellicle 402, as shown in Fig. 5B.

[0027] Heat Treatment of Pellicle

[0028] Mechanical attachment and clamping of the pellicle 402 to the outer and inner frames 404, 406 may be combined with, or be replaced by a heat treatment (also called a thermal treatment), which includes a heating and a cooling cycles, to hold and stretch the pellicle 402. Pellicle attachment to the frame may be achieved due to thermal expansion of the inner metal frame, which should be greater than both thermal expansions of polymer membrane and outer metal frame.

[0029] Figs. 6A and 6B illustrate the pellicle 402 and outer frame 404 of Fig. 4A before a heat treatment 600A and after the heat treatment 600B. The pellicle 402 may be slightly wrinkled (Fig. 6A) after being clamped between the frames 404, 406 and before a heat treatment. The heat treatment may remove wrinkles in the pellicle 402 (Fig. 6A) and stretch the pellicle 402 (Fig. 6B) between the frames 404, 406 (Figs. 4A-4B). The heat treatment may be in a temperature range above the glass transition temperature of the pellicle 402 (e.g., polymer) and below its melting temperature. The heat treatment may involve inserting the frames 404, 406 and pellicle 402 in an oven.

[0030] Selection of materials for the inner and outer frames 406, 404 may be important because a differential in thermal expansion coefficients of the pellicle 402, inner frame 406 and outer frame 404 may affect tension on the pellicle 402. The outer frame 404 may be selected to have a lower coefficient of thermal expansion than the inner frame 406. In another embodiment, the outer and inner frames 404, 406 may both have the same coefficient of thermal expansion. In the latter embodiment, thermal cycling may be combined with mechanical attachment.

[0031] As an example, the pellicle 402 and frames 404, 406 may be heated at a rate of 3 degrees Celsius per minute to a holding temperature, such as 200, 329 or 337 degrees Celsius. The holding temperature may be selected above a glass transition temperature (e.g., 131.7 degrees C in Fig. 10) of the pellicle 402 and up to a melting point temperature of the pellicle 402. For example, the melting point of PTFE film may be about 329 or 340 degrees Celsius, where 329 degrees Celsius may be an onset melting temperature. The pellicle 402 and mounted frames 404, 406 may be held at the selected holding temperature (e.g., 200, 329 or 337 degrees C) for an hour or other selectable duration.

[0032] Fig. 10 is a differential scanning calorimetry (DSC) graph 1000 of polytetrafluoroethylene (PTFE), which

may be used for the pellicle 402 of Fig. 4A. The heat flow (left vertical) axis in Fig. 10 represents heat absorption or heat production in Watts per gram (W/g). The diagonal line in Fig. 10 corresponds to values on the right axis, which represents time in minutes. The bottom (horizontal) axis represents temperature in degrees Celsius. At about 324.43 degrees Celsius, an energy of PTFE may be about 35.13 Joules/gram. Fig. 10 shows a glass transition temperature, a melting point temperature and a range in between the glass transition temperature and melting point temperature.

[0033] After the heat treatment, the frames 404, 406 and pellicle 402 may be cooled slowly to room temperature, e.g., at a rate of 4 degrees Celsius per minute. During the heat treatment and cooling, the pellicle 402 (e.g., polymer) clamped between the two frames 404, 406 (e.g., aluminum) may stretch onto the frames 404, 406, as shown in Fig. 6B. The mechanical stretching of the pellicle 402 upon cooling may be attributed to a differential in thermal expansion coefficients of the pellicle 402 (e.g., 8 parts per million (ppm)/degrees Celsius for PTFE) and the frames 404, 406 (e.g., 23.6 ppm/degrees Celsius for aluminum).

[0034] Using an inner frame 406 of greater thermal expansion coefficient than the outer frame 404 may be preferred to provide clamping of the pellicle 402 during thermal treatment. The clamping-stretching effect may be

more pronounced if the outer frame 404 comprised a material with a lower thermal expansion coefficient than the inner frame 406. For example, the outer frame 404 may be made of invar with a thermal expansion coefficient of 0 (zero)

5 ppm/degrees Celsius, and the inner frame 406 may be made of aluminum with a thermal expansion coefficient of 23.6 ppm/degrees Celsius. The inner frame 406 may expand less or more than the outer frame 404.

[0035] Mechanical attachment of the pellicle 402 to the frames 404, 406 (Figs. 4A-4B) and a subsequent heat treatment (Figs. 6A-6B) may maintain tension on the pellicle 402. The heat treatment may be a repeatable process to remove wrinkles in the pellicle 402. The heat treatment may be repeated to remove wrinkles on the thin pellicle film membrane 402 even after the pellicle frame 404 and/or 406 is attached to the reticle 702 (Fig. 7).

[0036] Attaching At Least One Frame to A Reticle

[0037] Fig. 7 illustrates the pellicle 402 and pellicle frames 404, 406 of Fig. 4A, a pre-cut polymer layer 700 and a reticle 702. The reticle 702 may be made of fused silica and have a coefficient of thermal expansion of 0.55 ppm/degrees Celsius. The outer frame 404 and/or the inner frame 406 may be attached to the reticle 702 by using the polymer layer 700 as an adhesive.

[0038] The polymer layer 700 may be a "low melting point polymer" having a melting point between about 60 to 150 degrees Celsius. The "low melting point polymer" may also be called a low melting point, low outgas thermoplastic.

5 For example, the polymer layer 700 may be a polyester thermoplastic obtained from 3M. Thermoplastic materials may be elastic. Typically, thermoplastic materials may have less residual impurities and solvents than other low molecular weight adhesive materials.

10 [0039] The polymer layer 700 may be pre-cut to match a size and shape of a bottom surface area of the inner frame 406 and/or outer frame 404, as shown in Fig. 7. The frames 404, 406 are laid over the pre-cut polymer layer 700. The frames 404, 406, polymer layer 700 and reticle 702 may be
15 aligned by a mounter. Heat and pressure may be applied to the frames 404, 406, polymer layer 700 and reticle 702 to achieve a hermetic seal or bond between the inner and/or outer frames 406, 404 and the reticle 702. The heat and pressure may remove any air gaps between the frames 404,
20 406, polymer layer 700 and reticle 702. The heat treatment may involve a temperature change from about 45 degrees to 150 degrees Celsius. The polymer layer 700 may be a polyester thermoplastic used with a 65-75 C degree bond line temperature, a 2-second dwell time and 50 pounds per square
25 inch (psi) pressure.

[0040] In an embodiment, only the inner frame 406 is attached to the reticle 702 with the polymer layer 700, which leaves the outer frame 404 free to absorb stress or displacement.

5 [0041] A thermoplastic seal between the frame 404 and reticle 702 may be reversibly removed by heating the pellicle 402, frames 404, 406 and reticle 702.

[0042] A thermoplastic seal may provide comparable or better particle protection properties than pressure sensitive gaskets, which are currently used as frame-to-reticle adhesives. The polymer layer 700 may have lower residual impurities and solvents than pressure sensitive gaskets. The polymer layer 700 may reduce a chance of outgasing and reduce pellicle deterioration.

15 [0043] Effects of Heating

[0044] Figs. 8A-8C are side views of a pellicle 800, a pellicle frame 802, an adhesive layer 803 and a reticle 804. The pellicle 800, pellicle frame 802, adhesive layer 803 and reticle 804 in Figs. 8A-8C may represent the pellicle 402, outer pellicle frame 404, polymer layer 700 and reticle 702 of Fig. 7 if a "non-localized" heat treatment is used to attach at least one of the frames 404, 406 to the reticle 702. "Non-localized" means heat is applied to all components of Figs. 8A-8C. "Localized" means heat is only applied to one or more specific components in Fig. 8A.

[0045] Fig. 8A illustrates the pellicle 800, pellicle frame 802 and adhesive layer 803, which are flat and unattached to the reticle 804 at an initial temperature of T.

5 [0046] Fig. 8B illustrates the pellicle 800, pellicle frame 802, adhesive layer 803 and reticle 804 of Fig. 8A moved to a location with a temperature of $T+\Delta T$ for bonding with a "non-localized" heat treatment. Heat and pressure are applied to bond the pellicle frame 802 to the reticle
10 804 using the adhesive layer 803.

[0047] Fig. 8C illustrates the pellicle 800, pellicle frame 802, adhesive 803 and attached reticle 804 being moved back to a location at temperature T. The non-localized temperature change during adhesive-to-reticle bonding may
15 cause an in-plane distortion of the pellicle frame 802 and reticle 804. For example, a distortion in the reticle 804 may cause a distortion in the pellicle frame 802. Fig. 8C may show an exaggerated amount of distortion because the actual distortion could not be easily seen in the real scale
20 of Fig. 8C. The in-plane distortion in Fig. 8C may occur from a thermal gradient ΔT between a mounting temperature and a stepper use temperature. Figs. 8A-8C may represent a worst-case scenario where both the reticle 804 and pellicle frame 802 are brought to the set temperature $T+\Delta T$ and back
25 to the original temperature T.

[0048] If a low melting point polymer layer 700 (Fig. 7) is used as an adhesive to bond at least one of the frames 404, 406 to the reticle 702, a good seal may be obtained by "locally" heating the polymer layer 700. For example, an
5 infrared gun may be used to locally heat the polymer layer 700. Local heating of the polymer layer 700 may cause less distortion than applying heat to the pellicle frames 404, 406 and the reticle 702 (Fig. 8C).

[0049] Fig. 9 illustrates a temperature change
10 (horizontal axis) of reticles and corresponding in-plane displacement or distortion (vertical axis). The reticles in Fig. 9 have various Young's modulus values (E_G). Fig. 9 shows that distortion may be greater for reticles with higher Young's modulus values. Distortion may increase
15 linearly with temperature. Although Fig. 9 shows a temperature change of 0.5 degrees Celsius, Fig. 9 may be used to predict distortion caused by a larger temperature change ΔT in bonding at least one of the frames 404, 406 to the reticle 702 with the polymer layer 700 in Fig. 7. For
20 example, the bonding temperature change may be from 45 degrees to 120 degrees Celsius. In another embodiment, the bonding temperature change may be from 65 degrees to 150 degrees Celsius. The overall magnitude of thermal induced distortion may be low since three out of four plots in Fig.

9 show less than 1 nm displacement for a 0.5 C degree gradient.

[0050] Fig. 11 illustrates a technique of attaching the pellicle 402 to the frames 404, 406 of Figs. 4A-4B and
5 attaching at least one of the frames 404, 406 to the reticle 702 of Fig. 6. The pellicle 402 of Fig. 4B is clamped between outer and inner frames 404, 406 at 1100. Screws 502 (Figs. 5A-5B) may be inserted through the frames 404, 406. The pellicle 402 may be heated to stretch the pellicle 402
10 and remove wrinkles (Figs. 6A-6B) at 1102. The outer frame 404 and/or the inner frame 406 may be bonded to a reticle 702 with a pre-cut polymer layer 700 (Fig. 7) at 1104.

[0051] The mechanical and thermal techniques, described above for attaching the pellicle 402, frames 404, 406 and
15 reticle 702 without using conventional adhesives, may reduce a potential for adhesive by-product outgasing and improve radiation durability (i.e., lifetime) of a "soft" polymer-based pellicle 402 for 193-nm and 157-nm lithography.

[0052] A number of embodiments have been described.
20 Nevertheless, it will be understood that various modifications may be made without departing from the spirit and scope of the application. The techniques described above may be used for other applications besides making pellicles. For example, other applications may use a method
25 comprising: clamping a polymer film between a first frame

and a second frame, the polymer film having a different coefficient of thermal expansion than the first and second frames; heating the polymer film in a range between a glass transition temperature and a melting temperature; and
5 cooling the polymer film after heating to stretch the polymer film.

[0053] Accordingly, other embodiments are within the scope of the following claims.

WHAT IS CLAIMED IS:

1. A method comprising:
placing a polymer layer between a reticle and a
5 pellicle frame; and
heating the polymer layer to a pre-determined
temperature to attach the reticle to the pellicle frame.
2. The method of Claim 1, wherein the polymer layer
10 has a melting point between about 60 to 150 degrees Celsius.
3. The method of Claim 1, wherein said heating heats
the polymer layer between about 45 to 150 degrees Celsius.
- 15 4. The method of Claim 1, further comprising applying
pressure to the reticle and the pellicle frame during said
heating.
5. The method of Claim 1, wherein the polymer layer
20 comprises a thermoplastic.
6. The method of Claim 1, further comprising forming
a hermetic seal between the reticle and the pellicle frame.

7. The method of Claim 1, further comprising cutting the polymer layer to match a bottom surface area of the pellicle frame.

5 8. The method of Claim 1, wherein said heating is local to the polymer layer bonding the pellicle frame to the reticle.

9. An apparatus comprising:
10 a polymer layer shaped to match a bottom surface area of a pellicle frame, the polymer layer being adapted to attach a pellicle frame to a reticle with heat applied proximate to the polymer layer.

15 10. The apparatus of Claim 9, wherein the polymer layer has a melting point between about 60 to 150 degrees Celsius.

11. The apparatus of Claim 9, wherein the polymer
20 layer is bonded to the pellicle frame and the reticle with heat between about 45 to 150 degrees Celsius.

12. The apparatus of Claim 9, wherein the polymer
layer is bonded to the pellicle frame and the reticle with
25 heat localized proximate to the polymer layer.

13. The apparatus of Claim 9, wherein the polymer layer is adapted to attach a pellicle frame to a reticle when pressure is applied to at least one of the pellicle frame and the reticle.

14. The apparatus of Claim 9, wherein the polymer layer comprises a thermoplastic.

15. The apparatus of Claim 9, wherein the polymer layer is adapted to form a hermetic seal between the reticle and the pellicle frame.

16. An apparatus comprising:
a frame;
a reticle; and
a polymer layer shaped to match a bottom surface area of the frame, the polymer layer being adapted to attach the frame to the reticle with heat applied proximate to the polymer layer.

17. The apparatus of Claim 16, wherein the polymer layer comprises a polyester thermoplastic.

1/6

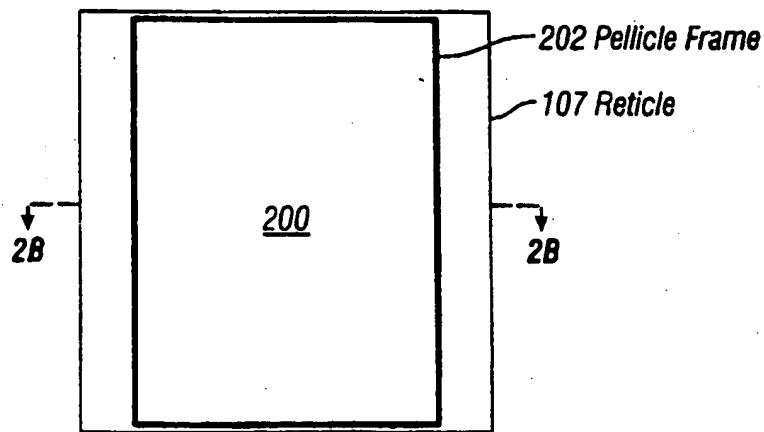
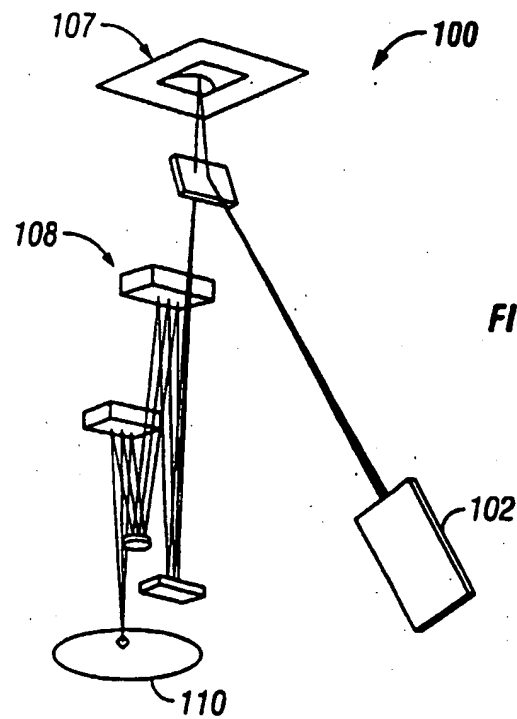


FIG. 2A




FIG. 2B

2/6


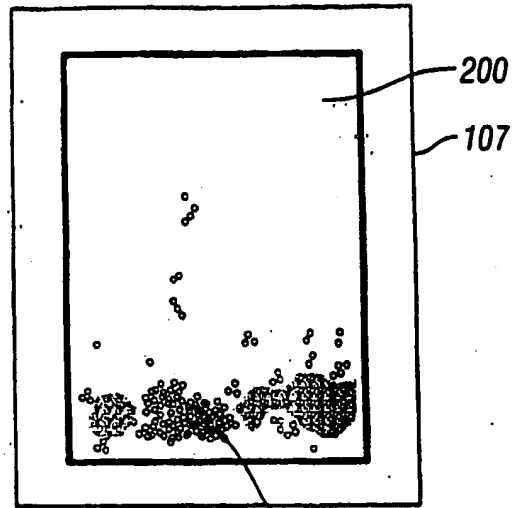


FIG. 3 300

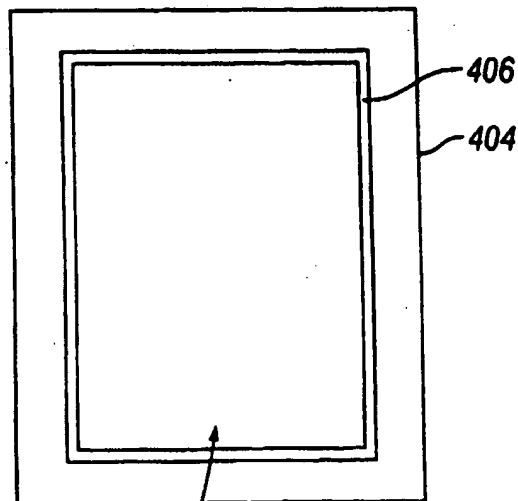

Pellicle Membrane 402 400

FIG. 4A

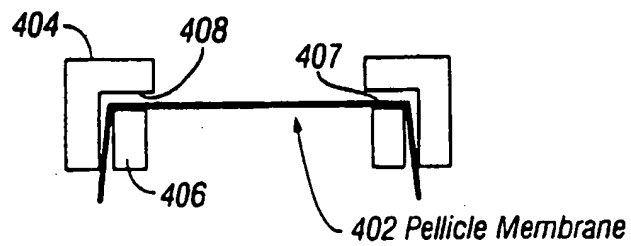


FIG. 4B

3/6

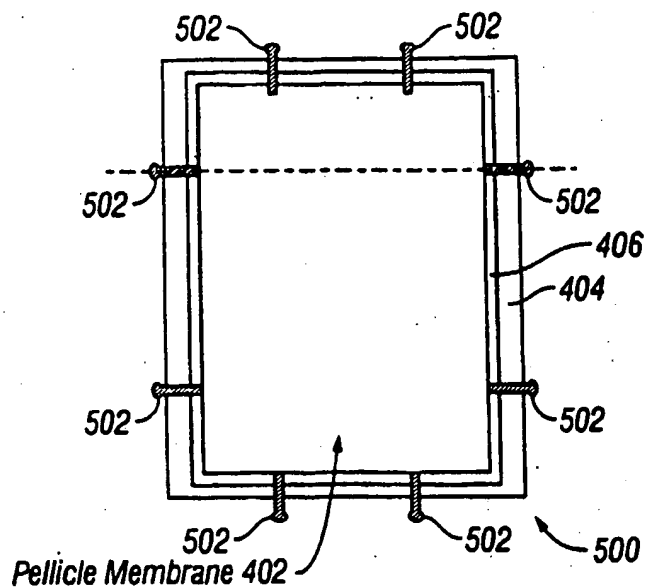


FIG. 5A

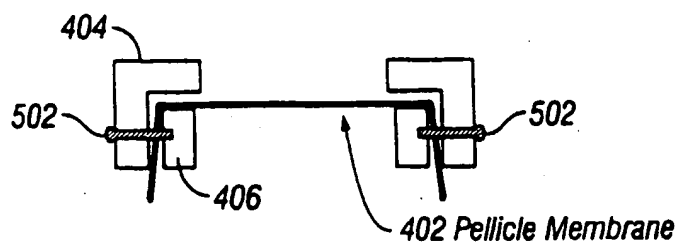


FIG. 5B

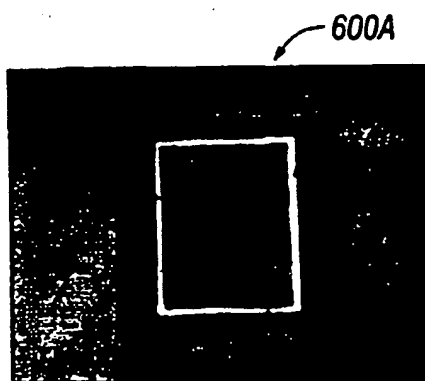


FIG. 6A

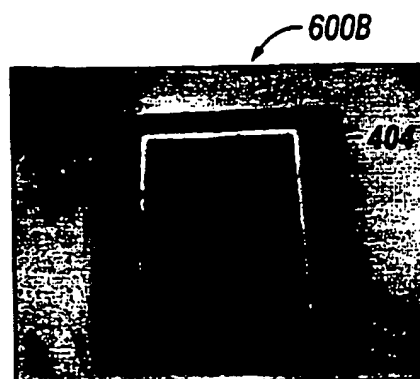


FIG. 6B

BEST AVAILABLE COPY

4/6

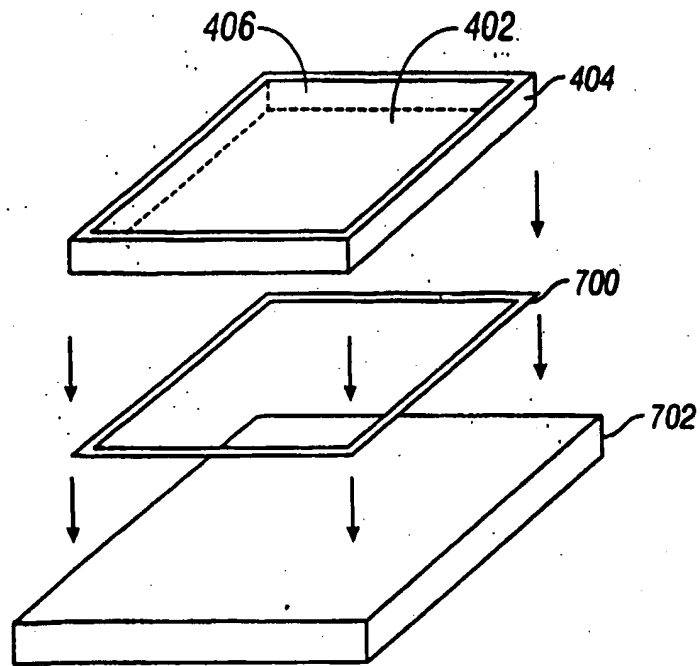


FIG. 7



FIG. 8A



FIG. 8B



FIG. 8C

5/6

900

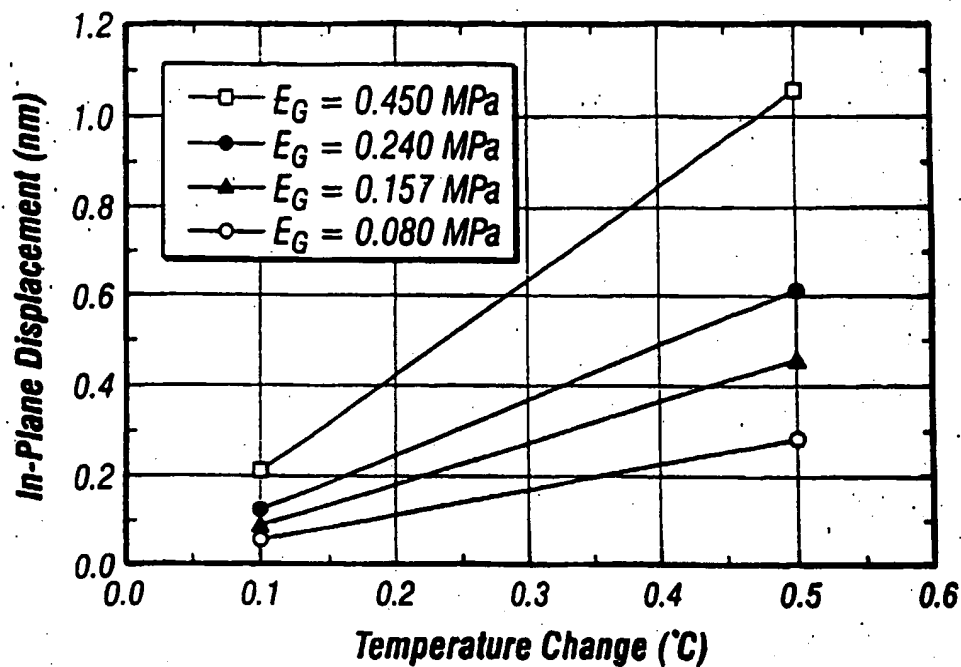


FIG. 9

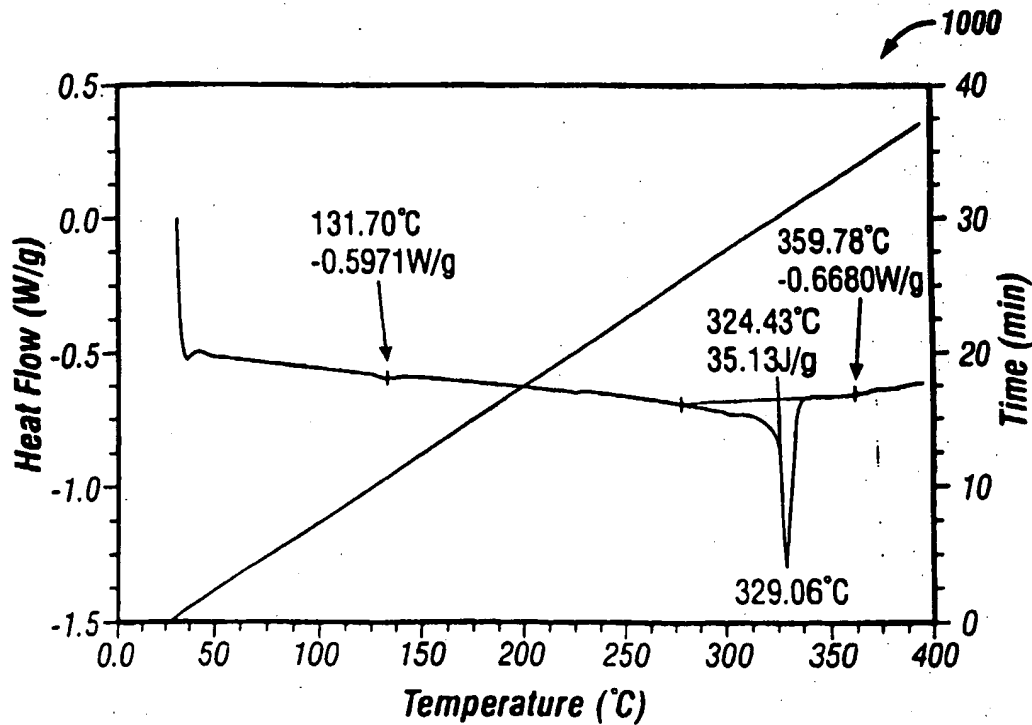


FIG. 10

6/6

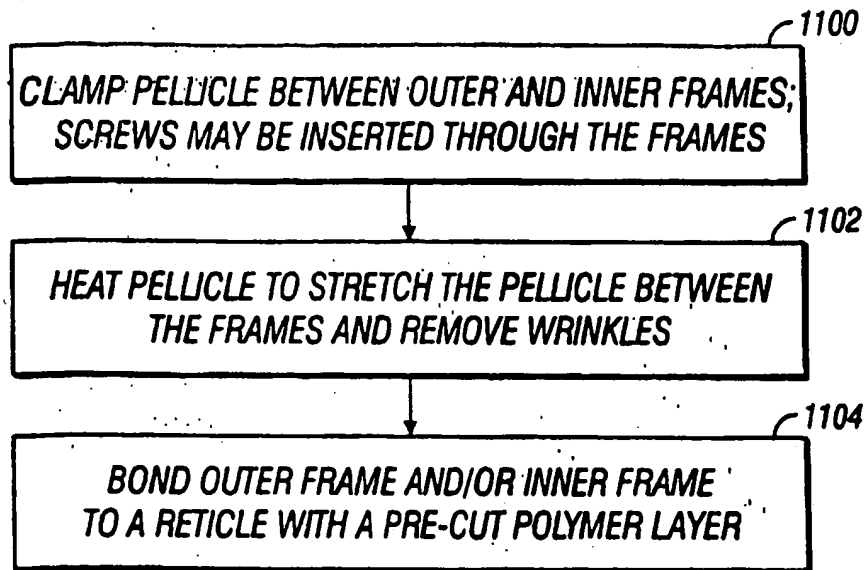


FIG. 11

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 March 2005 (10.03.2005)

PCT

(10) International Publication Number
WO 2005/022259 A3

(51) International Patent Classification⁷: **G03F 1/14**

(21) International Application Number:
PCT/US2004/027198

(22) International Filing Date: 20 August 2004 (20.08.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/649,354 26 August 2003 (26.08.2003) US

(71) Applicant: INTEL CORPORATION [US/US]; 2200
Mission College Boulevard, Santa Clara, CA 95052 (US).

(72) Inventors: LO, Fu-Chang; 2779 Ross Road, Palo Alto,
CA 94303 (US). ZIMMERMAN, Paul; 141 Llano Court,
Cedar Creek, TX 78612 (US). ESCHBACH, Florence;
25 Bear Paw, Portola Valley, CA 94028 (US). TREGUB,
Alexander; 140 Symphony Lane, Oak Park, CA 91377
(US).

(74) Agents: HARRIS, Scott, C. et al.; Fish & Richardson P.C.,
12390 El Camino Real, San Diego, CA 92130 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

(88) Date of publication of the international search report:
6 October 2005

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: ATTACHING A PELLICLE FRAME TO A RETICLE

(57) Abstract: A pellicle membrane is mounted between an outer frame and an inner frame. At least one of the frame is attached to the reticle without using conventional adhesive. The pellicle and reticle may be used in a lithography system. The pellicle allows radiation to pass through the pellicle to the reticle and may prevent particles from passing through the pellicle.



WO 2005/022259 A3

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US2004/027198

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G03F1/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G03F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, INSPEC, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WEN CHEN ET AL: "Pellicle-induced reticle distortion: an experimental investigation" PROCEEDINGS OF THE SPIE - THE INTERNATIONAL SOCIETY FOR OPTICAL ENGINEERING SPIE-INT. SOC. OPT. ENG USA, vol. 3546, 1998, pages 167-172, XP002339118 ISSN: 0277-786X page 168, right-hand column	9-17
X	EP 0 942 325 A (DUPONT PHOTOMASKS, INC) 15 September 1999 (1999-09-15) the whole document ----- -/--	9-17

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *S* document member of the same patent family

Date of the actual completion of the international search

3 August 2005

Date of mailing of the international search report

25/08/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Haenisch, U

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2004/027198

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>COTTE E P ET AL: "Experimental and numerical studies of the effects of materials and attachment conditions on pellicle-induced distortions in advanced photomasks"</p> <p>PROCEEDINGS OF THE SPIE - THE INTERNATIONAL SOCIETY FOR OPTICAL ENGINEERING SPIE-INT. SOC. OPT. ENG USA, vol. 4754, 2002, pages 579-588, XP002339129</p> <p>ISSN: 0277-786X</p> <p>page 583 - page 584</p>	
A	<p>COTTE E P ET AL: "Effects of soft pellicle frame curvature and mounting process on pellicle-induced distortions in advanced photomasks"</p> <p>PROCEEDINGS OF THE SPIE - THE INTERNATIONAL SOCIETY FOR OPTICAL ENGINEERING SPIE-INT. SOC. OPT. ENG USA, vol. 5040, no. 1, March 2003 (2003-03), pages 1044-1054, XP002339119</p> <p>ISSN: 0277-786X</p>	
A	<p>COTTE E P ET AL: "Numerical and experimental studies of pellicle-induced photomask distortions"</p> <p>PROCEEDINGS OF THE SPIE - THE INTERNATIONAL SOCIETY FOR OPTICAL ENGINEERING SPIE-INT. SOC. OPT. ENG USA, vol. 4562, 2002, pages 641-651, XP002339120</p> <p>ISSN: 0277-786X</p>	